


FL-OSPUN-600 SERIES

Application

Flood light is designed to illuminate building facade, building security, indoor and outdoor stadiums, monuments, statues, exhibition halls, shopping centres, showrooms, display areas, residences, etc.

Specification

Input Voltage	200-240 V AC
Power Factor	> 0.9
IP Rating	IP65
Rendering Index	> 70 (CRI80, CRI90 upon request)
Lumen Per Watt	157lm/w
LED Operating Life	>50, 000 Hrs
Operating Temperature	-30° to +45° C
Colour Correlated Temperature	3000K - 6500K
Available Colour	White/Silver/Black
Dimmable	Optional
Driver	Built-in

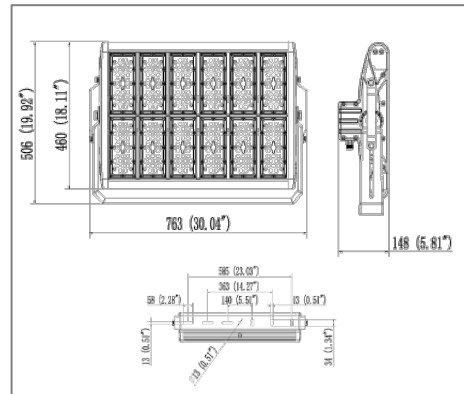

Ordering Data

Part No.	Power	Lumen	Beam Angle
EVO-FL-OSPUN-600-1515-X	600W	94,200lm	15° x 15°
EVO-FL-OSPUN-600-3030-X			30° x 30°
EVO-FL-OSPUN-600-6060-X			60° x 60°
EVO-FL-OSPUN-600-9060-X			90° x 60°
EVO-FL-OSPUN-600-85135-X			85° x 135°

Remark: 'X' (CCT) = "30"(3000K) / "40"(4000K) / "50"(5000K) / "65"(6500K)
 (More CCT preference available upon request)

* Product specification subject to change according to technology improvement.